




Design	Pneumatic double-piston rotary actuator in rack and pinion design	
Function	Double- and single-acting	
Material	Housing	Anodised aluminum ASTM 6083, UNI 4522
	Caps	Aluminum UNI 5076, epoxy resin coated
	Pistons	Aluminum UNI 5076
	Pinion	Steel, nickel-plated (optional: stainless steel)
	Bearings	POM
	Sealings	NBR, optional: FKM or silicone
Temperature range	Standard (NBR)	-50°C...+70°C
	High temperature (Viton)	-15°C...+160°C
	Extended temperature (Silicone)	-60°C...+200°C
ATEX marking	CE	II 2 G Ex h IIC T5...T2 Gb II 2 D Ex h IIIC 170°C Db
Control pressure	2...8 bar	
Control media	Dry, filtered air or inert gases in respect of remaining oil-, dust and water-content according to DIN ISO 8573-1 / class 4, maximum particle diameter 30µm, dew point minimum 10°C below ambient temperature	
Mounting position	Any mounting position	
Nominal rotation angle	90°, 120°, 180° resp. 240° Adjustable in one end position +/-5° (optional 100% stroke adjustment) Version BE: Adjustable in both end positions	
Standards	Interface actuator/ feedback-unit	VDI/VDE 3845 resp. NAMUR
	Interface actuator/ control media	VDI/VDE 3845 resp. NAMUR
	Interface actuator/ valve	ISO 5211 and DIN 3337



Torque diagram

Double-acting


Provides a linear and constant torque through the complete pivoting angle in both pivoting directions.




Single-acting

Provides a linearly reducing torque through the complete pivoting angle in both pivoting directions.

Offers the maximum torque at the beginning of each stroke to overcome the breakaway torque.

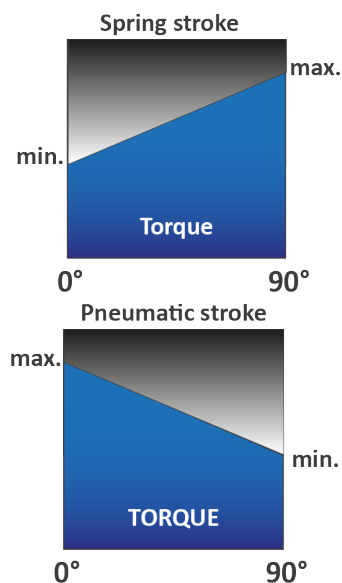


Dimensions

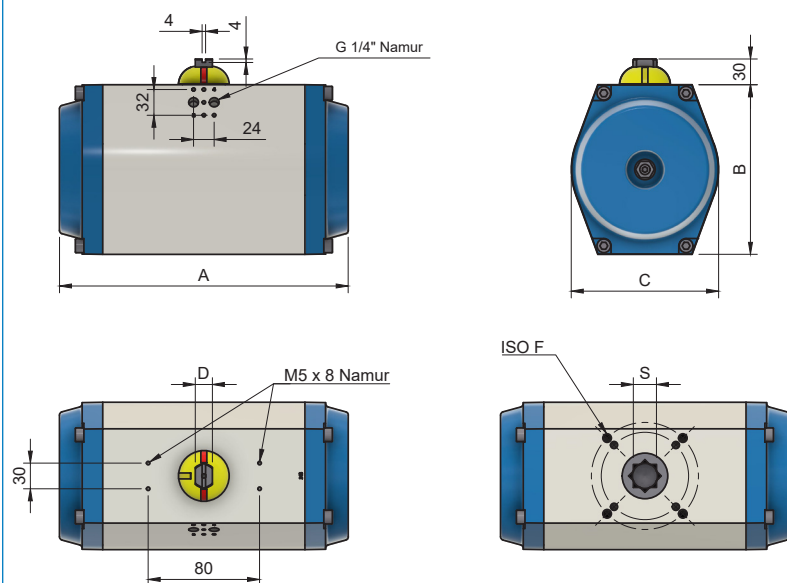


Angle adjustment

Variant „Standard“



The switch position can be adjusted by $\pm 5^\circ$ for a precise setting of the final valve position. The optional stroke adjustment offers a 100% setting of the switched end position.

Variant „BE“



With the “BE” option, both end position can be set independently of one another for fine adjustment.

Dimension table

Dimensions in mm							
90°	A 120°	180°	B	C	D	S	ISO-F
223	253	323	140	120	14	22	F07/F10

Volume, weight

Volume (l)				Weight (kg)			
90° single-acting	90° double-acting	120° double-acting	180° double-acting	90° single-acting	90° double-acting	120° double-acting	180° double-acting
0,98	1,90	2,15	3,52	6,20	5,20	6,10	7,20

Torques double-acting

Control Pressure in bar (g)	2	2,5	3	3,5	4	4,5	5	5,5	6	6,5	7	8
Torque in Nm	58	72	87	101	116	130	145	162	174	188	203	232

Torques single-acting

		Torque pneumatic stroke in Nm at Control Pressure in bar (g)																	
		Torque spring in Nm		2		3		4		5		5,5		6		7		8	
Spring set		max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.
Torque in Nm	2	24	16	42	34	71	63	100	92	129	121	146	138	158	150	187	179	216	208
	4	47	32	26	10	55	39	84	68	113	97	130	114	142	126	171	155	200	184
	6	71	47	-	-	39	15	68	44	97	73	114	90	126	102	155	131	184	160
	8	95	63	-	-	-	-	52	19	81	48	98	66	110	77	139	106	168	135
	10	119	79	-	-	-	-	-	-	64	24	82	42	93	53	122	82	151	111
	12	142	95	-	-	-	-	-	-	-	-	66	17	77	29	106	58	135	87